


NO. OF CONTACTS	A	B	C
9	.500	.395	.200
15	.650	.545	.350
21	.800	.695	.500
25	.900	.795	.600
31	1.050	.945	.750
37	1.200	1.095	.900
51	1.550	1.445	1.250



TOLERANCE: .XXX ±.005 .XX ±.01 ANGLE ±1°	TITLE <b>NANO METAL SHELL SINGLE ROW JUMPER</b>	SHT 1 OF 2	DWG. NO. <b>CNA01</b>	REV <b>D</b>
--	--	------------	--------------------------	-----------------

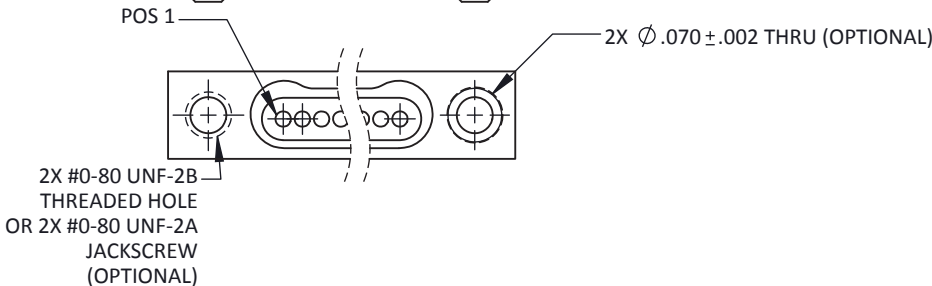

# NANO METAL SHELL SINGLE ROW JUMPER

CNA 01— XX X—X X X X X X

NANO METAL SHELL  
JUMPER

BODY STYLE  
01 = SINGLE ROW

NUMBER OF CONTACTS  
09 31  
15 37  
21 51  
25

GENDER  
P = PIN, PLUG SHELL  
S = SOCKET, RECEPTACLE SHELL  
B = PIN & SOCKET (ONE EACH END)

HARDWARE  
0 = NONE (THRU HOLE ONLY)  
J = JACKSCREW (CAPTURED) - PIN SIDE  
T = #0-80 THREADED HOLE - SOCKET SIDE  
B = JACKSCREW PIN SIDE / THREADED HOLE SOCKET SIDE  
W=JACKSCREW (CAPTURED) - BOTH SIDES  
D= #0-80 THREADED HLE - BOTH SIDES

SHELL AND FINISH  
ALUMINUM  
A = CADMIUM  
B = NICKEL  
C = ZINC-NICKEL  
G = GOLD  
STAINLESS STEEL  
P = PASSIVATE  
TITANIUM  
T = TITANIUM (FINISH N/A)

WIRE LENGTH  
STRANDED (+1.00 / -0.00)  
1 = 6 INCHES  
2 = 12 INCHES  
3 = 18 INCHES  
4 = 24 INCHES  
5 = 36 INCHES  
6 = 72 INCHES

WIRE SIZE  
0 = 32 AWG STRANDED  
1 = 30 AWG STRANDED

WIRE COLOR  
0 = WHITE

TERMINATION  
WIRE TYPE  
STRANDED  
H = HARNESS (MIL-W-16878/6)  
S = SPACE M22759/33  
M = 04047-30A  
N = NEMA HP3

MATERIALS AND FINISHES ARE IAW MIL-DTL-32139.  
FOR DETAILS SEE MIL-SPEC OR WWW.CRISTEK.COM

**1. MATERIALS:**

SHELL - ALUMINUM ALLOY, STAINLESS STEEL OR TITANIUM  
INSULATOR - LIQUID CRYSTAL POLYMER OR  
GLASS FILLED THERMOPLASTIC  
CONTACT - COPPER ALLOY

**2. FINISH:**

SHELL - ELECTROLESS NICKEL OR CADMIUM OVER  
ELECTROLESS NICKEL OR PASSIVATE OR GOLD  
OR ZINC NICKEL  
CONTACT - GOLD OVER NICKEL

**3. SPECIFICATIONS:**

CURRENT RATING ----- 1 AMP MAX  
TEMPERATURE RATING ----- -55° C TO +125° C  
INSULATION RESISTANCE ----- 5000 MEGOHMS  
DWV AT SEA LEVEL ----- 250 VAC  
DWV AT 70,000 FT ALTITUDE --- 100 VAC  
CONTACT RESISTANCE ----- 71 mV DROP MAX @ 1 A  
CONTACT RETENTION ----- 2 LBS AXIAL LOAD  
ENGAGEMENT FORCE ----- 5 oz MAX  
SEPARATION FORCE ----- 0.4 oz MIN

**4. ADDITIONAL INFORMATION:**

FOR OTHER TERMINATIONS, CONTACT CRISTEK.

TOLERANCE: .XXX ±.005 .XX ±.01 ANGLE ±1°	TITLE <b>NANO METAL SHELL SINGLE ROW JUMPER</b>	SHT 2 OF 2	DWG. NO. <b>CNA01</b>	REV <b>D</b>
--	--	------------	--------------------------	-----------------